


Remarks:

705 St. Paul Street Rochester, New York 14605 Telephone: (585) 248-4100 Fax: (585) 248-4111 E-mail: gratings@newport.com Web Site: http://gratings.newport.com

DIFFRACTION GRATING SPECIFICATION SHEET

| Catalog no. | 53-*-550R | | | 1/22/2014 | |
|---------------------|---|-------|---------------|------------------|---------|
| Grating Description | 600 g/mm plane ruled reflection grating with 28.7° nominal blaz | | | | e angle |
| Master no. | 1056 | | | | |
| Maximum Ruled / | | | groove length | ו | 154 mm |
| | | | ruled width: | | 206 mm |
| | | | | | |
| Efficiency Curve | spectral order: | m = 1 | 1 | polarization(s): | S and P |
| | Coating: | alum | aluminum | | |

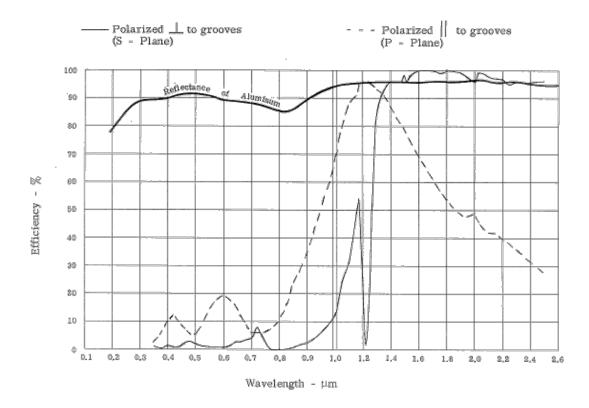

Note: The efficiency curve above is relative (not absolute) and was measured in an in-plane near Littrow configuration (unless otherwise indicated). Efficiency curves are only representative: actual efficiency may vary significantly depending on use geometry and measurement technique. This efficiency curve is for master 1056; two masters with the same catalog number may have different efficiency curves. The uncertainty band on the data in the above efficiency curve(s) is +/- three percentage points.